

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/AU04/001555

International filing date: 12 November 2004 (12.11.2004)

Document type: Certified copy of priority document

Document details: Country/Office: AU
Number: 2003906218
Filing date: 12 November 2003 (12.11.2003)

Date of receipt at the International Bureau: 08 December 2004 (08.12.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/AUPCT/AU2004/001555

**Patent Office
Canberra**

I, LEANNE MYNOTT, MANAGER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. 2003906218 for a patent by BHC CONSULTING PTY LTD as filed on 12 November 2003.

WITNESS my hand this
First day of December 2004

A handwritten signature in black ink, appearing to be 'LM' or 'Leanne Mynott'.

LEANNE MYNOTT
MANAGER EXAMINATION SUPPORT
AND SALES



54966 KMC:LR

P/00/009
Regulation 3.2

AUSTRALIA
Patents Act 1990

ORIGINAL

PROVISIONAL SPECIFICATION FOR AN INVENTION ENTITLED

Invention Title: BHC CONSULTING PTY LTD
Name of Applicant: METAL DETECTION IMPROVEMENTS
Address for Service: COLLISON & CO. 117 King William Street,
Adelaide, S.A. 5000

The invention is described in the following statement :

This invention relates to metal detectors and methods of metal detection.

The invention relates in particular to a method of assisting accuracy of generation of a constant reactive voltage and of implementing low power electronic circuitry whilst maintaining constant reactive transmit voltages.

- 5 This invention has particular application to metal detectors which are to operate in environments of varying magnetic permeability, such as magnetic soils, which may alter the inductance of a transmit coil during interrogation of such an environment.

A reactive transmit voltage may have a waveform such as a rectangular waveform or a pulsed signal sequence, depending on a required application.

- 10 The concepts described herein are also useful for the detection of conductors whether these are ferrous materials or non-ferrous materials but which are relatively good electrical conductors in environments containing relatively mildly conducting materials.

A general form of most metal detectors which are used to interrogate soils is a hand-held battery operated unit, a conveyor mounted unit, or a vehicle mounted unit.

- 15 Examples of hand-held products include detectors used to locate gold, explosive land-mines, coins and treasure. Examples of conveyor-mounted units include tramp metal or fine gold detectors in ore mining operations and industrial metal detectors to locate contaminants in food or pharmaceutical products, and examples of vehicle-mounted detectors include metal detector arrays used to locate explosive land-mines. These
20 units usually consist of a transmit coil to transmit an alternating magnetic field associated with a reactive transmit voltage, transmit electronics which generate a transmit signal applied to the transmit coil, and receive electronics which receive a magnetic field and process received signals to produce an indicator output. By far the most numerous products of the above examples are the hand-held battery operated products. It is
25 desirable that these have low power consumption to maximise battery life.

A transmit coil may be approximately represented as consisting of an effective inductive component impedance in series with an effective resistive component impedance which may include resistance of cabling and connectors and some elements of the transmit electronics.

- 30 One problem with metal detectors which transmit more than one frequency and are used to search an environment of varying magnetic permeability such as magnetic soils, is that

the transmit coil's effective inductive component impedance is modulated by variable magnetic permeability, which in turn alters a reactive transmit voltage by differing amounts at different frequencies. Considering that a principal advantage of such metal detectors usually lies in an ability to compare a received magnetic signal interrogation of the environment at different frequencies (or frequency profiles), a different modulation of the transmit reactive voltage at different frequencies creates inaccuracies in useful received and processed signal calculations. In practice effective inductive component impedance may vary by up to a few percent in the most permeable soils.

Examples of multi-frequency transmission include simultaneous sinewaves, and all forms of "time domain" pulsed or rectangular waveforms. Pulsed or rectangular waveforms effectively transmit many frequencies as is known from Fourier analysis. Examples (which are not considered to be mere paper publications and are not acknowledged as being common general knowledge of multi-frequency transmission in magnetic soils) are given in US4,942,360 and examples of rectangular waveform transmission in magnetic soils are given in US5,537,041. The invention described herein may be advantageous over the art disclosed in these mere patent publications.

Accordingly a voltage applied to a transmit coil may be considered to have approximately two series voltage components. One results from an effective reactive transmit voltage (V_x) (non-energy dissipative, magnetic) across a transmit coil's effective inductive component impedance (X), and the other an effective resistive voltage component (V_r) (energy dissipative, non-magnetic) across a transmit coil's effective resistive component impedance (R). A vector sum of these two effective voltage components equals an applied voltage (V_{applied}). That is, in terms of a sinewave of frequency w ,

$V_{\text{applied}} = V_r + V_x$, where

$$V_{\text{resistive}} = V_r = V_{\text{applied}}(R/\sqrt{R^2 + X^2}) = V_{\text{applied}}(R/\sqrt{R^2 + (wL)^2}) \quad (i),$$

$$V_{\text{reactive}} = V_x = V_{\text{applied}}(X/\sqrt{R^2 + X^2}) = V_{\text{applied}}(jwL/\sqrt{R^2 + (wL)^2}) \quad (ii)$$

Where for a sinewave frequency w , $X = jwL$ where L is the effective transmit coil inductance, and the total effective series impedance is

$$Z = X + R = jwL + R \quad (iii)$$

An alternating magnetic field transmitted by the transmit coil is only related to the effective reactive transmit voltage component while the effective resistive transmit voltage component contributes nothing to this field. This transmitted magnetic field may induce both resistive and reactive magnetic fields in an environment owing to the properties of the environment which may in turn induce voltage signals in a receive coil used for magnetic reception. This induced voltage is applied to receive electronics for processing for assessment of the magnetically interrogated environment.

For two equal voltages applied to the transmit coil (V_{applied}) at frequency w_1 and w_2 , the ratio of the respective effective reactive transmitted voltage components at w_1 and w_2 equals

$$\text{Ratio}_{12} = \sqrt{((R/w_2)^2 + L^2)/((R/w_1)^2 + (w_1/w_2)^2 L^2)} \quad (\text{iv})$$

To highlight that this is a function of L , this may be rewritten as

$$\text{Ratio}_{12} = \sqrt{(k_1 + L^2)/(k_1 + k_2 L^2)} \quad (\text{v})$$

Where k_1 and k_2 are constants and the salient point is that k_2 is not equal to 1.

- In most multi-frequency transmission metal detector systems, the transmit/receive coil usually is a transmit coil plus a receive coil intrinsically nulled, but imperfectly so. Owing to both magnetic and capacitive coupling, the intrinsic coupling between the transmit and receive coil in practice is un-nulled and frequency dependent. The un-nulled components are usually temperature dependent.
- Hence if the reactive transmit voltage varies differently at different frequencies with variations in L , one received component at one frequency may not be compared to another without knowledge of L , the properties of the transmit/receive coil null (and k_1 and k_2). This requires several different measurements and requires complex calculations.
- Thus, in order to avoid these complex measurement and compensating calculations, an answer according to this invention is to maintain a substantially constant ratio between the reactive transmit voltage components at frequencies of receiving relevance, that is V_{applied} should be varied by differing amounts at different frequencies to compensate for environmental modulation of the transmit coil's inductive component impedance.

In one form then, although it may not be the only or the broadest form, the invention can be said to reside in a metal detector of the type being discussed which is adapted to maintain a substantially constant ratio between the reactive transmit voltage components at frequencies of receiving relevance, that is the detector ensures that V_{applied} is varied
5 by differing amounts at different frequencies to compensate for environmental modulation of the transmit coil's inductive component impedance.

In the alternative, the invention can be said to reside in a method of detection which includes in the method of detection whereby a substantially constant ratio between the reactive transmit voltage components at frequencies of receiving relevance is
10 maintained, that is the detector ensures that V_{applied} is varied by differing amounts at different frequencies to compensate for environmental modulation of the transmit coil's inductive component impedance.

This may be achieved in two alternate ways: which is to say by keeping the reactive transmit voltages constant or by keeping the reactive transmit voltages at frequencies to
15 be received and processed constant relative to each other but not necessarily constant in absolute magnitude.

The second method has problems with the coil null, but in practice is still better than no compensation whatever.

One way of satisfying the second method is by maintaining a constant transmit coil
20 current waveform. One way this may be achieved is by the use of a current generator with the desired transmit current waveform connected to the transmit coil.

One way of satisfying the first method is by feeding a transmit coil (plus connecting leads and connectors etc) with a negative resistance approximately equal to the total (positive) resistance of effective transmit coil's series effective resistive impedance plus
25 that of the transmit coil's leads and connectors (if any) connecting to the electronics, plus any series effective output (positive) resistance of any other transmit electronics circuitry connected to the transmit coil. This circuit arrangement cancels the total series effective resistive impedance of the transmit coil and may thus be driven by a fixed applied voltage waveform which therefore approximately equals a fixed effective reactive
30 transmit voltage.

No matter how the transmit electronic circuits are designed to satisfy the requirement of the transmitter being capable of transmitting constant reactive transmit voltage

waveforms, under varying transmit coil inductance conditions, all such electronic circuits must contain at least one linear amplifier and an alternating varying voltage output (or fixed current waveform which results in a varying voltage) applied to the transmit coil to achieve the required compensation.

- 5 Electronic circuitry arrangements which will provide low power consumption include inductive/capacitive resonators at the transmitted frequencies in the case of (pure) multi-sinewave transmission; and class-D amplifiers which transmit the desired waveform

The multi-frequency inductive/capacitive resonator systems plus circuitry required to maintain frequency independent reactive transmit voltage in variable transmit coil

- 10 Inductance conditions are relatively expensive.

So too are class-D amplifiers plus circuitry required to maintain frequency independent reactive transmit voltage in variable transmit coil inductance conditions.

It is also possible to employ a combination of switching transmit waveforms generated by low on resistance/high off resistance switches connected to power rails connected to

- 15 relatively high valued storage capacitors.

Certain circuit arrangements using this system are capable of low cost implementation and relatively simple circuits, even if this includes circuitry to compensate for frequency dependent transmit coil inductance modulation and thus to maintain constant reactive transmit voltages. This will require in addition at least one linear transmit amplifier

- 20 connected to a lower voltage power supply than the switching circuitry power supply voltage, with the linear amplifier's power supplies connected to the switching power supplies.

Here "linear" amplifier may mean an analogue amplifier or a digital switching class-D amplifier controlled for example, by dsp circuitry. The class-D amplifiers are more

- 25 expensive and complex than analogue counterparts.

Examples of some useful metal detectors of this type include

a "frequency domain" multi-frequency detector which has switched transmit waveforms producing relatively strong (Fourier component) transmissions at the desired operational frequencies, say for example three frequencies, plus receive demodulation at these

- 30 said multi-frequency (say three) frequencies, followed by filtering.

US4,942,360 describes useful demodulation processing;

a "time domain" continuous transmitting switched rectangular reactive voltage waveform which incorporates just two transmitted reactive voltage levels; one positive and the other negative, plus receive demodulation synchronised to the transmit waveform followed by filtering.

5 US5,537,041 describes useful demodulation processing:

a "time domain" continuous transmitting three different reactive voltage level switched rectangular waveforms; one reactive transmit voltage being positive another negative and the other zero, plus receive demodulation synchronised to the transmit waveform, particularly during the zero reactive voltage transmission followed by filtering. Here the
10 transmit coil current waveform during the zero reactive voltage transmission may be non-zero unlike pulse induction metal detectors for example, which also have periods of zero reactive transmit voltage but simultaneous zero transmit current.

Similar demodulation processing described in US5,576,624 may produce high performance detection in magnetic soils.

15 The current flowing in an inductor is proportional to the integral of the (series) reactive voltage component across the effective series inductive impedance component. Thus the (series) resistive voltage component equals this current multiplied by the effective series resistive component impedance. Thus if the desired current through the transmit coil is to be proportional to the integral of the switched transmit voltage waveform, then
20 the voltage applied to the transmit coil must equal the switched transmit voltage plus a voltage proportional to the integral of the switched transmit voltage. That is

$$V_{\text{applied}} = V_{\text{switched}} + \text{integral}(V_{\text{switched}})R/L \quad (\text{vi}).$$

The latter source equal to $\text{integral}(V_{\text{switched}})R/L$ may be implemented by including the use of a linear amplifier. In order to minimise power consumption, the supply to the
25 linear amplifier should be as low as possible, so that output saturation is just avoided.

Consider the simple case of a squarewave transmission at say 2.5kHz, a switched transmit voltage of +/- 5V (10V peak-to-peak) which equals the desired reactive transmit voltage, a transmit coil of 0.25mH effective series inductance and effective series resistance of 0.5ohm which includes leads and connectors to the electronics plus
30 the effective output impedance of the switched transmitter electronics, which may include, for example a series large valued decoupling electrolytic capacitor. The desired

peak current is therefore

$$(5V \times (1/(4 \times 2500)) \text{ seconds})/0.25mH = 2A (=4A \text{ peak-to-peak}).$$

Thus the required compensating triangular wave (the integral of a square wave) which need be generated at the linear amplifier's output is $2A \times 0.5ohm = 1V$ peak (2V peak-to-peak). A suitable supply to the linear amplifier for such a system may be say 2.5V to allow for a little headroom. This is a typical logic-level power supply which may be simultaneously used by a microprocessor and for other logic. Here, the switching electronics may be connected to one end of the transmit coil via a series capacitance of say 20,000microfarad, and the linear amplifier's output to the other end of the transmit coil; both connections being via leads and a connector for example. The series capacitance required for D.C. blocking effectively reduces the inductance by a small fraction (approx 1%), and of course need be taken into account in calculations.

In one form, the invention may be said to reside in an electronic metal detector having a transmit coil which is adapted to transmit an alternating magnetic field associated with a reactive transmit voltage, transmit electronics adapted to generate a transmit signal applied to the transmit coil, receive electronics adapted to receive a magnetic field and process received signals to produce an indicator output, wherein the said transmit coil approximately consists of an effective inductive component impedance in series with an effective resistive component impedance which includes resistance of transmit coil cabling and connectors, and the transmit electronics includes at least a linear amplifier connected to the transmit coil, and such that when a selected output signal of the linear amplifier is selected the reactive transmit voltage is approximately constant for at least a time period during which a magnetic field is received and processed by the receive electronics to produce an indicator output.

In one form the invention may be said to reside in a method for detection of metallic targets in an environment of varying magnetic permeability using an electronic metal detector having a transmit coil which is adapted to transmit an alternating magnetic field associated with a reactive transmit voltage, transmit electronics which is adapted to generate a transmit signal applied to the transmit coil,

receive electronics which are adapted to receive a magnetic field and process received signals to produce an indicator output,
wherein the said transmit coil approximately consists of an effective inductive component impedance in series with an effective resistive component impedance which
5 may include resistance of transmit coil cabling and connectors,
and the transmit electronics includes at least a linear amplifier connected to the transmit coil,
including selecting an output signal of the linear amplifier such that the reactive transmit voltage is approximately constant for at least a time period during which a magnetic field
10 is received and processed by the receive electronics to produce an indicator output.

In preference, it is such that when an output signal of the linear amplifier is selected the reactive transmit voltage is approximately constant for at least a time period during which a magnetic field is received and processed by the receive electronics to produce an indicator output for a range of transmit coil effective inductive component impedance
15 which impedance may vary by a few percent in value owing to varying magnetic permeability in the environment of the transmit coil.

In a further form, the invention may be said to reside in an electronic metal detector having
a transmit coil adapted to transmit an alternating magnetic field associated with a reactive
20 transmit voltage,
transmit electronics adapted to generate a transmit signal applied to the transmit coil,
receive electronics adapted to receive a magnetic field signal and process received signals to produce an indicator output,
wherein the said transmit coil includes an effective inductive component impedance in
25 series with an effective resistive component impedance including any resistance of transmit coil cabling and connectors,
and the transmit electronics includes at least a linear amplifier and switching voltage electronics which are connected to the transmit coil,
such that the transmit signal includes at least two components
30 a switched voltage component generated by the switching voltage electronics
consisting of periods of at least two different switched voltages, at least a first switched voltage during a first period, and second switched voltage during a second period,
and at least one component generated by the linear amplifier whose output
approximately linearly changes in time during a third period within the said first period,
35 such that when a selected output signal of the linear amplifier is selected the reactive

transmit voltage is approximately constant during a third period for a range of transmit coil effective inductive component impedance which may vary by a few percent in value owing to varying magnetic permeability in the environment of the transmit coil, and adapted such that the receive electronics receives a magnetic field signal during at
5 least a period during the third period which is processed to produce an indicator output.

In preference said switched voltage components are adapted to generate a sequence of switched voltage periods selected such that Fourier components of this sequence contain at least two frequencies of substantial magnitude,

the receive electronics are adapted to be responsive at the said at least two frequencies
10 ,
and a ratio of reactive transmit voltages at each of the said at least two frequencies is approximately constant for the said range of transmit coil effective inductive component impedance which may vary by a few percent in value.

In another form the invention may be said to reside in a method for detection of metallic
15 targets in an environment of varying magnetic permeability using an electronic metal detector having
a transmit coil adapted to transmit an alternating magnetic field associated with a reactive transmit voltage,
transmit electronics including at least a linear amplifier and switching voltage electronics
20 connected to the transmit coil,
wherein the said transmit coil includes an effective inductive component impedance in series with an effective resistive component impedance including any resistance of transmit coil cabling and connectors;
generating a transmit signal applied to the transmit coil such that the transmit signal
25 includes at least two components
a switched voltage component generated by the switching voltage electronics consisting of periods of at least two different switched voltages, at least a first switched voltage during a first period, and second switched voltage during a second period, and at least one component generated by the linear amplifier whose output
30 approximately linearly changes in time during a third period within the said first period, selecting an output signal of the linear amplifier such that the reactive transmit voltage is approximately constant during a third period for a range of transmit coil effective inductive component impedance which may vary by a few percent in value owing to varying magnetic permeability in the environment of the transmit coil;

receiving a magnetic field signal and processing said received signals to produce an indicator output, during at least a period during the third period which is processed to produce an indicator output.

5 In preference said switched voltage components are adapted to generate a sequence of switched voltage periods selected such that Fourier components of this sequence contain at least two frequencies of substantial magnitude, the receive electronics are adapted to be responsive at the said at least two frequencies and a ratio of reactive transmit voltages at each of the said at least two frequencies is
10 approximately constant for the said range of transmit coil effective inductive component impedance which may vary by a few percent in value.

In preference, the reactive transmit voltage is approximately zero voltage during the third period.

15 In preference the component values of the electronic circuitry including the linear amplifier are selected such that an effective negative resistance is generated which approximately equals the sum of the resistance of the effective resistive component impedance plus the effective series output resistance, and the negative effective resistance is in series with the transmit coil.

20 In preference, in the alternative, the component values of the electronic circuitry including the linear amplifier are selected such that a ramp voltage is generated which approximately is proportional to the integral of the switched voltage component.

In preference, in the alternative, the component values of the electronic circuitry including the linear amplifier are selected such that a ramp current is generated which approximately is proportional to the integral of the switched voltage component.

25 In preference, the said switching voltage electronics includes power supply storage capacitors and the forward transfer gain of the ramp voltage is controlled by a servo-loop which endeavours to maintain low constant current flow to the switching voltage electronics including storage capacitors which may act to store charge, some of which may flow back and forth through the switching voltage electronics and transmit coil.

30 To assist with the understanding of this invention, reference will now be made to the drawings wherein:

Figure 1 shows an electronic system constructed according to the invention capable of transmitting a reactive transmit voltage independent of transmit coil inductance, and includes a 3-level switched transmit voltage generator, plus a linear generator.

Figure 2 shows an example of a negative resistance generator which includes at least a linear amplifier.

Figure 3 shows waveforms for an embodiment of the invention including a 2-level switched transmit voltage generator which generates 3 frequencies of reasonable strength, suitable for dsp-sinewave demodulation.

Figure 4 shows voltage waveforms and transmit coil current waveforms for an embodiment of the invention including a 3-level switched transmit voltage generator.

Figure 5 shows an example of waveforms associated with a metal detector of the invention which is sensitive to ferrous contamination in products (free of ferrous material) associated with relatively mildly electrically conductive material.

Referring specifically to the drawing transmit coil 1 approximately may be represented by an effective resistance component impedance 2 of value R in series with an effective inductive component impedance 3 of inductance value L . This is connected to transmit electronics which may generate a transmit signal applied to the transmit coil. This transmit electronics may include a series capacitor 13 connected to an active generator 4 which includes at least a linear amplifier. The transmit electronics also includes switching voltage electronics 5 which in this example consists of three low impedance solid state switches 7, 8 and 9, which is also connected to the transmit coil. Switch 7 is connected to a power supply supplying supply input 10, switch 9 to a power supply supplying supply input 11 and switch 8 to earth 6. Power supply input 10 is a.c. coupled to earth via storage capacitor 16 and power supply input 11 is a.c. coupled to earth via storage capacitor 17. The switches 7, 8 and 9 are controlled to be on or off by timing control circuit 14. Receive electronics includes a receive coil 20 which is connected to preamplifier 21 which feeds demodulators 22. These feed low pass filters 23 which remove transmit frequencies from the signals supplied by 22. Signals from these low pass filters are then processed in processor 24 to produce an indicator signal 25. Demodulation may be achieved by dsp or synchronous switched demodulation techniques. This is controlled by timing control circuit 14 as well. Generator 4 is supplied by earth and a power supply at 12, which for minimum power consumption should supply a voltage

just greater than the peak-to-peak output voltage of generator 4. For certain systems, timing control circuit 14 may supply a signal to generator 4.

In an alternative preferred embodiment, generator 4 may be implemented as a negative resistance generator to compensate R which may includes the resistance of the transmit coil cabling plus connector.

A constant transmit reactive voltage waveform may be generated which equals the switched voltage component, independent of L.

In an alternative preferred embodiment, generator 4 may be implemented as a current generator wherein the current waveform is approximately proportional to the integral of the switched transmit voltage at the node of switches 7, 8 and 9.

The current waveform will be in the form of a ramp with a constant alternating sign slope associated with the transmit switched voltage component sign. This current waveform slope is zero if the transmit switched voltage component is zero. For a fixed current waveform, there is no need to connect power supplies to 10 and 11 as the voltage across storage capacitors 16 and 11 will be self-levelling. In this case the independence of the reactive transmit voltage to changes in transmit coil inductance is valid assuming low losses in the switching voltage electronics. The current defines the relative (but not absolute) reactive transmit voltages to be in constant proportion at different frequencies independent of transmit inductance.

In an alternative preferred embodiment, generator 4 may be implemented as a voltage generator wherein the output voltage waveform is approximately proportional to the integral of the switched transmit voltage at the node of switches 7, 8 and 9.

The absolute voltage level may be changed to compensate for changes in transmit inductance. This may be achieved by either monitoring the transmit current and employing a negative feedback servo-loop system to maintain this to be constant by altering the forward transfer gain of generator 4, that is the magnitude of the integral of the switched voltage waveform which generates a ramp voltage waveform is altered; or monitoring the current supplied by the supplies feeding 10 and 11 and again employing a negative feedback servo-loop system to maintain this to be constant and near zero, by altering the forward transfer gain of the voltage ramp generated in generator 4.

Alternatively the voltage waveform at the output of generator 4 may be kept constant and power supplies feeding 10 and 11 removed which will result in a "self-levelling" dc voltage across storage capacitors 16 and 17.

Figure 2 shows an example of a negative resistance generator. This includes a linear operational amplifier 30 which is connected to a low value resistor 32 which supplies the generator's output 31. 31 is fed back to the inverting input as a negative feedback path. The output of the operational amplifier is connected to the non-inverting input via a series capacitor 33 and resistor 34 as a positive feedback path. This positive feedback path is attenuated by means of a load consisting of resistor 35 connected to a voltage reference 37 and capacitor 36 connected to earth. The low frequency positive feedback is attenuated at low frequencies by 33/34/35 and the high frequencies by capacitor 36. This is necessary for both low and high frequency stability. The output impedance is approximately

$$Z = -R_{32}R_{35}/R_{34}.$$

To compensate for the variable voltage drop across R as the inductance L is modulated by magnetic soils, -Z should be set close in value to R. For example, if R is say 0.5ohm, and R32 is chosen to be say 0.1 ohms, R34 to be 100ohms and R35 say 470 ohms, this will result in a near constant reactive transmit voltage. Capacitor 36 should at least compensate the effective parallel capacitance of the transmit coil and the time constant of C33(R34+R35) should be substantially greater than the lowest relevant transmit fundamental period of the transmit waveform, say >100 times.

(A similar system may be implemented using dsp circuitry and a class-D amplifier for example.)

Figure 3 shows a simple example of a 2-level transmit switched voltage component waveform which generates a sequence of switched voltage periods selected to contain at least 3 Fourier component frequencies of substantial magnitude:

one with a period equal to the fundamental period of the waveform defined to be between 41 and 43, another 4 times this frequency and another 16 times the fundamental frequency.

In this example, the waveform happens to have an inverted symmetry relative to 42. The numbers above the waveform indicate a clock counter for ease of understanding.

For typical soil searching applications to search for military land-mines, gold nuggets or coins, the fundamental frequency may be in the region of 1 to 4 kHz, say 3kHz, in which case the mid-frequency in this example is 12kHz and the higher frequency 48kHz.

These may be "sinewave" demodulated in the receive electronics by dsp circuits for example. These demodulated signals may then be further processed for an indicator output.

Figure 4 shows an example of a 3-level switched reactive transmit voltage waveform, and corresponding current and receive waveforms. The output levels of the switched voltage component of the switching voltage electronics are positive 54, earth 55 and negative 56. The fundamental period of the generated sequence is between 51 and 53 and the waveform is strongest at two different fundamental frequencies, one equal to that of the fundamental and the other 16 times the fundamental. The current waveform is shown as 57, 58, 59 and 60. The voltage waveform generated at the output of 4 is identical in shape to this current signal. This increases when the switched voltage waveform is positive, such as 59 during the long positive switched voltage level, decreases when the switched voltage waveform is negative, such as periods 58 during the short positive switched voltage level periods, and held constant during the periods when the switched voltage component is at earth (0V) potential such as periods 57 and 60. Periods 57 correspond to the short zero potential periods and 60 to the long period. These periods of constant current and zero reactive transmit voltage is only possible when the resistive transmit voltage component is reasonably accurately compensated, using for example, the circuit shown in figure 1. The periods of zero transmit reactive voltage is useful for reception with minimal reactive transmit voltage signal interference.

The receive signal is shown as the bottom waveform for the interrogation of magnetic soils with dominant reactive (non-dissipative "instantaneous") component but also a significant loss (dissipative "historic") component.

The period 62 shows the receive voltage waveform during the application of a long period zero reactive transmit switched voltage.

The period 63 shows the receive voltage waveform during the application of short period zero reactive transmit switched voltages.

The period 64 shows the receive voltage waveform on a different vertical scale (relatively compressed) during the application of the short periods of negative reactive transmit switched voltages.

5 The period 65 shows the receive voltage waveform also on a compressed vertical scale during the application of the long period positive reactive transmit switched voltage.

Note that during the short switching periods, both the long period and short period components are received simultaneously. Thus is reflected in a gradual change in the received loss component during zero reactive transmit voltage periods from one short
10 period pulse to the next within a fundamental cycle.

As shown in the above figures, it is necessary that the switching voltage electronics produces at least two different switched voltages during at least two different periods, a least a first voltage during a first period and a second voltage during a second period.

In all the above examples, the reactive transmit coil voltage is held approximately
15 constant throughout the entire transmit waveform. This is not necessarily to produce an indicator output which is independent of the transmit coil's effective inductive component impedance which may vary. It is necessary that the reactive transmit voltage is approximately constant during at least part of a transmit signal, say during a third period (which may occur within the first period for example), and that the receive electronics
20 receives a magnetic field only within the (third) periods when the reactive transmit voltage is approximately constant, and this received signal is processed to give an Indicator output.

Another useful application of the above principles of transmission of periods of constant reactive transmit voltage (wherein the transmit coil inductance need not vary significantly)
25 is in conveyor mounted metal detectors used in industry for the detection of ferrous contamination in food or pharmaceuticals which may be associated with relatively mild conductivity of either the product packaging, such as aluminium foil, or intrinsic to the product such as moist salt. Examples of ferrous contamination include steel screws and staples. During periods of non-zero constant reactive transmit voltage, the induced eddy
30 currents in the relatively mild conducting materials will decay relatively rapidly following a transition of the switched voltage component to a constant current. The constancy of this current depends on the constancy of the reactive transmit voltage. (If this is not constant, the eddy current decay will not be asymptotically constant.) This corresponds to an

- Induced receive voltage decaying away relatively rapidly following a transition of the switched voltage component to an asymptotic zero voltage. However ferrous targets produce both an eddy current decay signal and a field-enhancing signal. If demodulation occurs during periods of constant reactive transmit voltage and during periods when the eddy current signal from the relatively mildly conductive medium has effectively (decayed) to zero, then signals from both ferrous targets and relatively longer period non-ferrous targets which may contaminate a product may be detected free from the decayed signal of the relatively mildly conducting material associated with the product. For example, for typical aluminium lids of about 10cm or so diameter used to seal plastic containers, a square-wave transmit voltage signal of a few kHz or there about (depending on the aluminium thickness) is satisfactory, and the receive demodulation may occur during the last portion of each positive and negative period between square-wave transitions. For much thinner aluminium barriers lining plastic packets for example, this frequency may be increased by an order of magnitude or so.
- Figure 5 illustrates an example of typical waveforms of such a system. The top waveform is the desired reactive transmit voltage signal. The waveform below this is the transmit voltage waveform required to be applied to the transmit coil to achieve the top waveform, that is the square-wave plus a signal proportional to the integral of the square-wave, namely a triangular-wave to compensate for the transmit coil's effective series resistance. The second bottom waveform is the received voltage from the interrogation of relatively mildly conductive material associated with the product being interrogated by the metal detector. The bottom signal is that received from the interrogation of a ferrous target. For simplicity, both the receive signals are shown assuming a perfect transmit-receive coil null.
- Here 72 is the negative transmit voltage (first switched voltage) during half of the square-wave period (first period), 73 is the positive voltage (second switched voltage) during half of the square-wave period (second period). This is symmetrical about zero volts 71. Both 72 and 73 are generated by the switching voltage electronics.
- 74 is the first switched voltage plus a ramp of negative slope, and 75 is the second switched voltage plus a ramp of positive slope. The ramps which sum to the triangular-wave are generated with the use of a linear amplifier.

80 is at zero volts. 81 is the induced voltage received signal resulting from the eddy current decay signal in the relatively mildly conductive material during the first period and 82 that received during the second period.

84 is the eddy current decay signal from a ferrous target plus a constant negative voltage component resulting from the magnetisation of the ferrous material during the first period, and similarly 85 is that received during the second period.

This system has advantages over the more common type of static field ferrous detectors in that it can be designed to be free of $1/f$ electronic noise owing to synchronous demodulation and thus also be insensitive to changes in the earth's field due to moving machinery in the factory for example. In addition, some of the more conductive non-ferrous targets may be detected owing to the relatively slower decay periods (e.g. coins) which is not possible with a static field.

Throughout this specification the purpose has been to illustrate the invention and not to limit this.

15

Dated this 12th day of November 2003

BHC CONSULTING PTY LTD

By his Patent Attorneys

20 COLLISON & CO

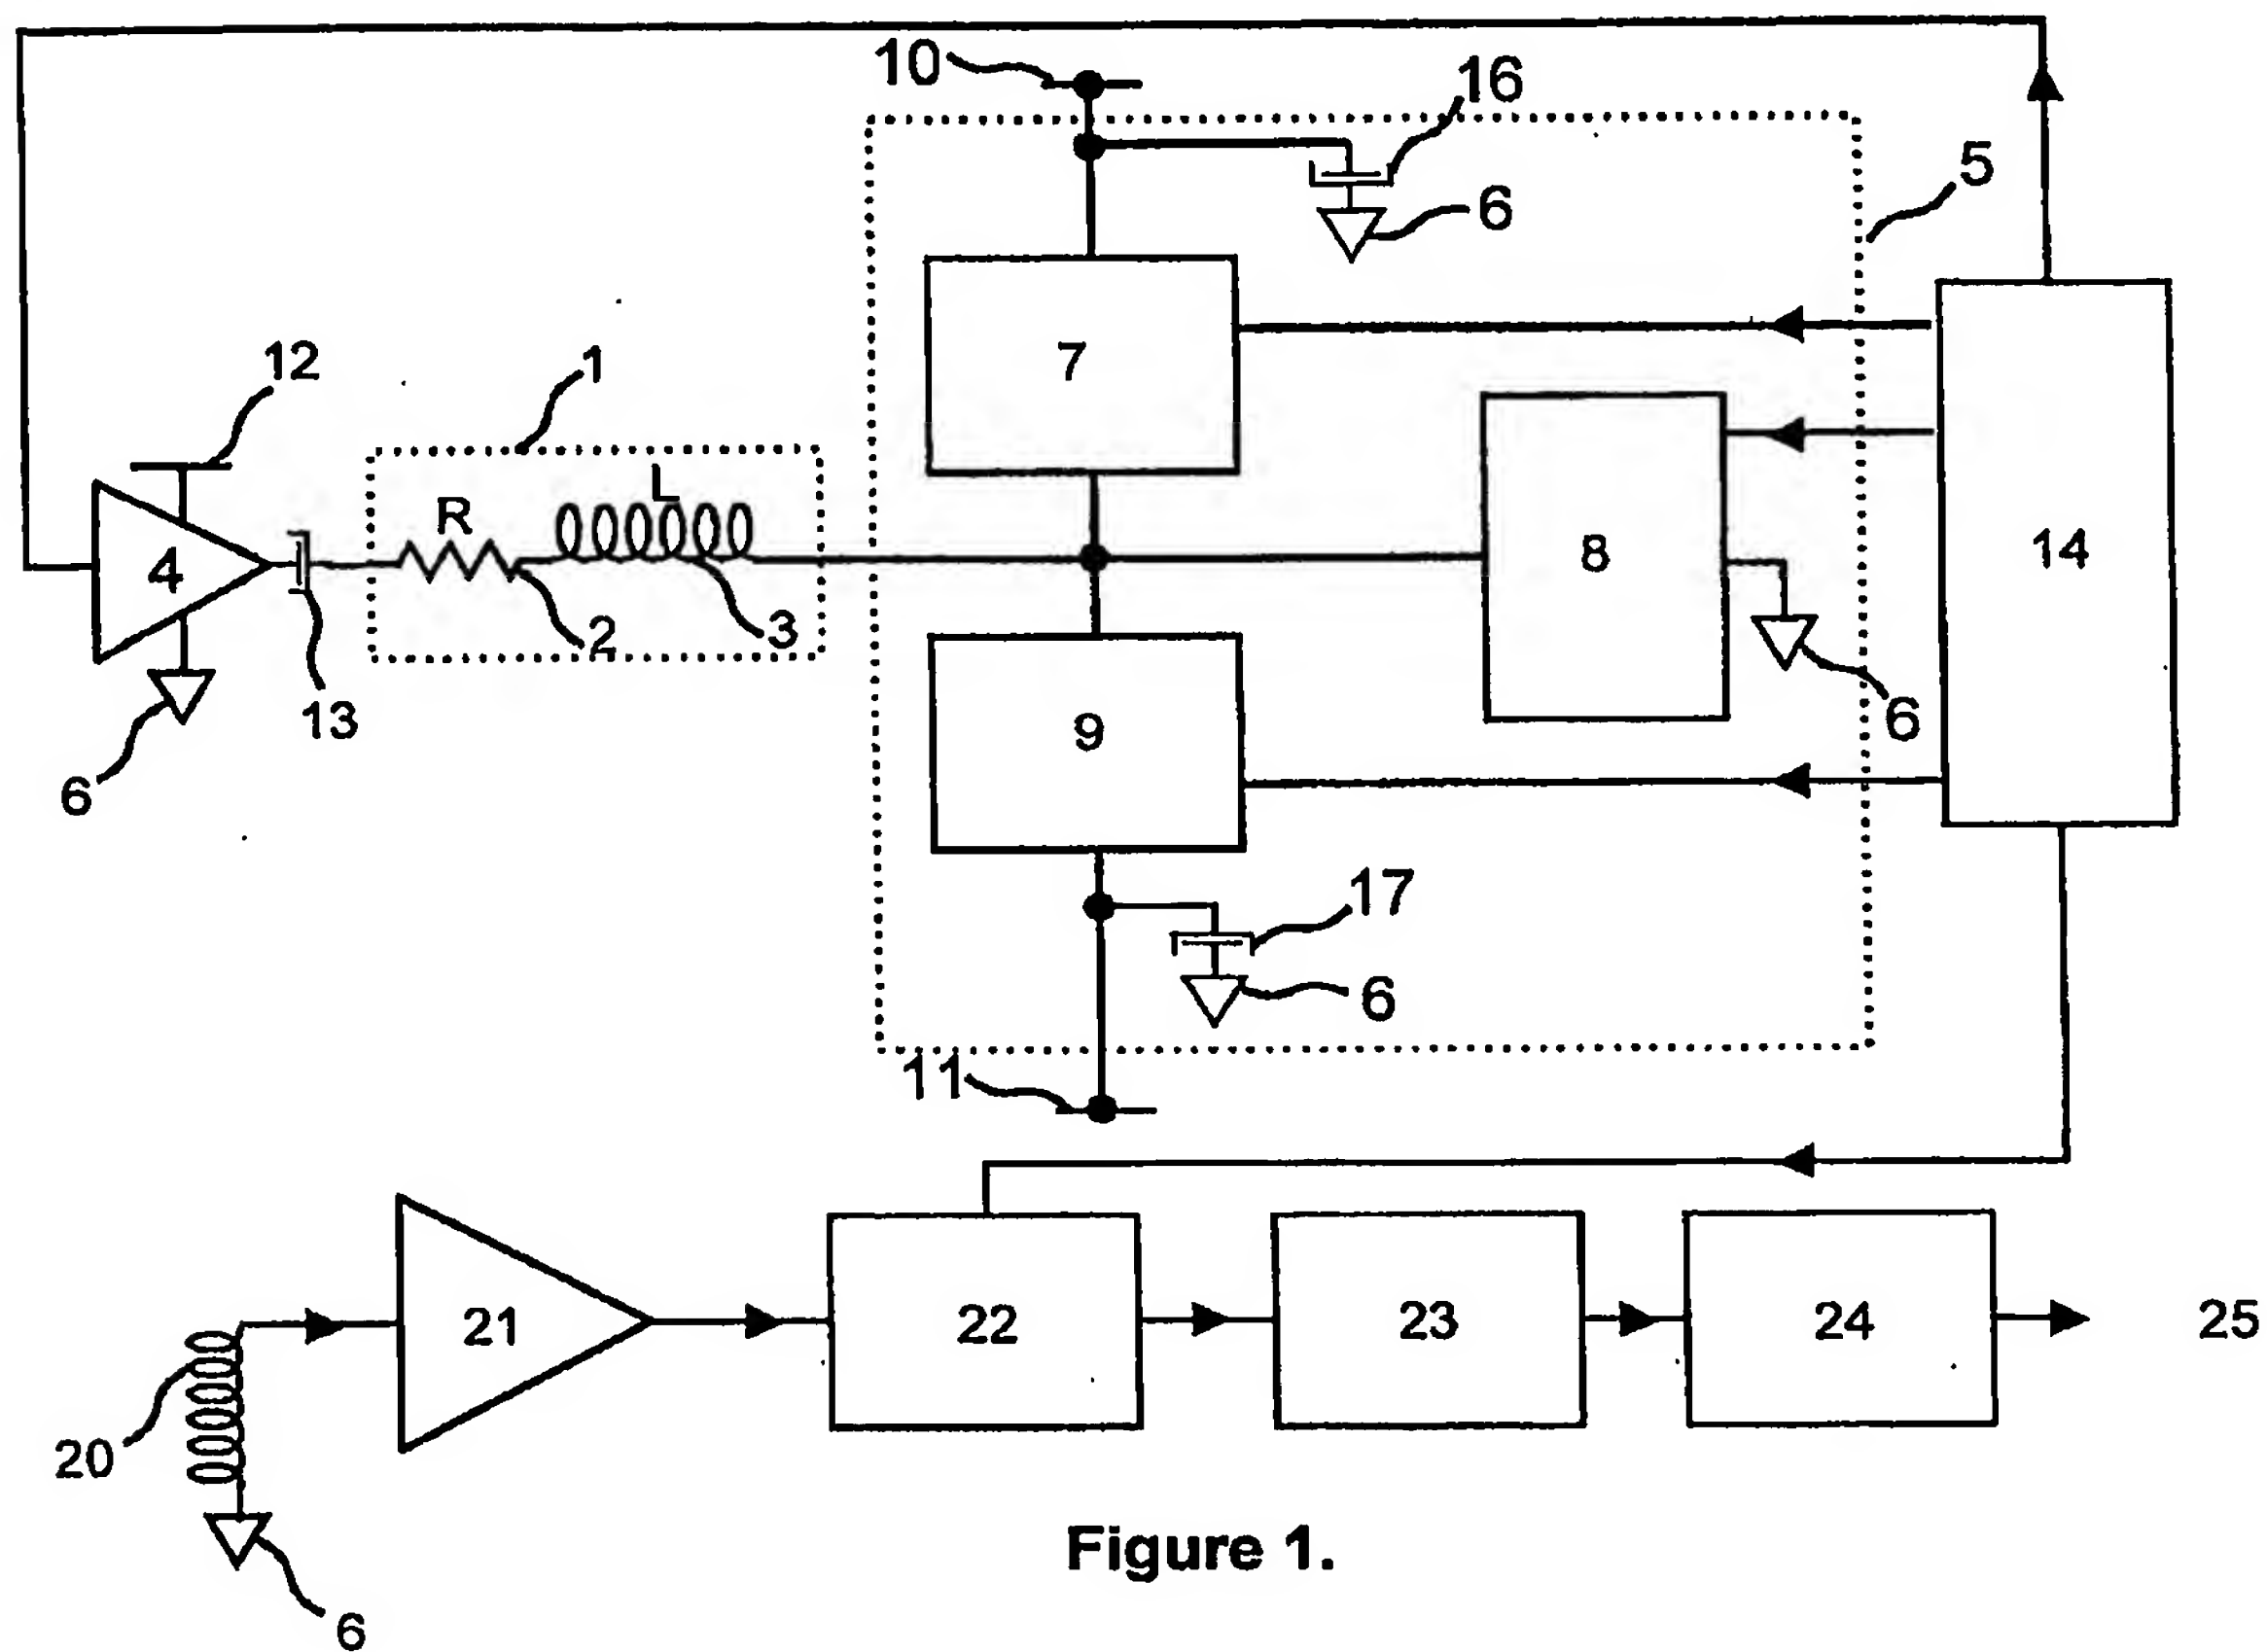


Figure 1.

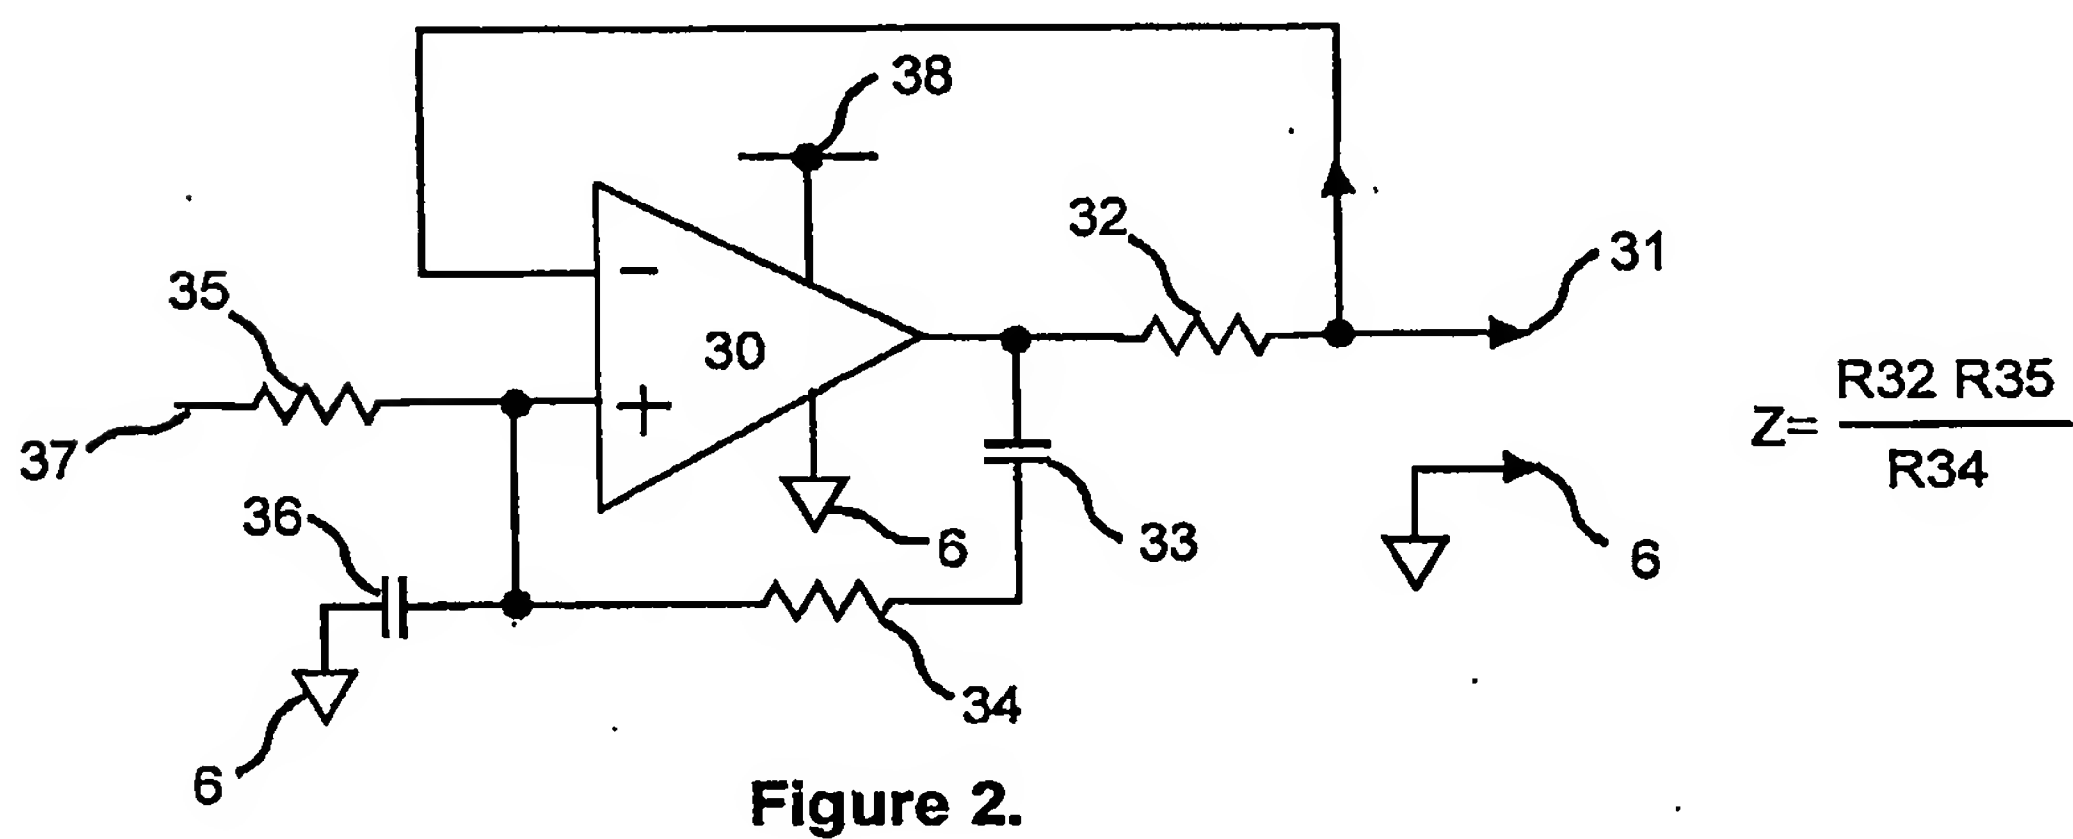


Figure 2.

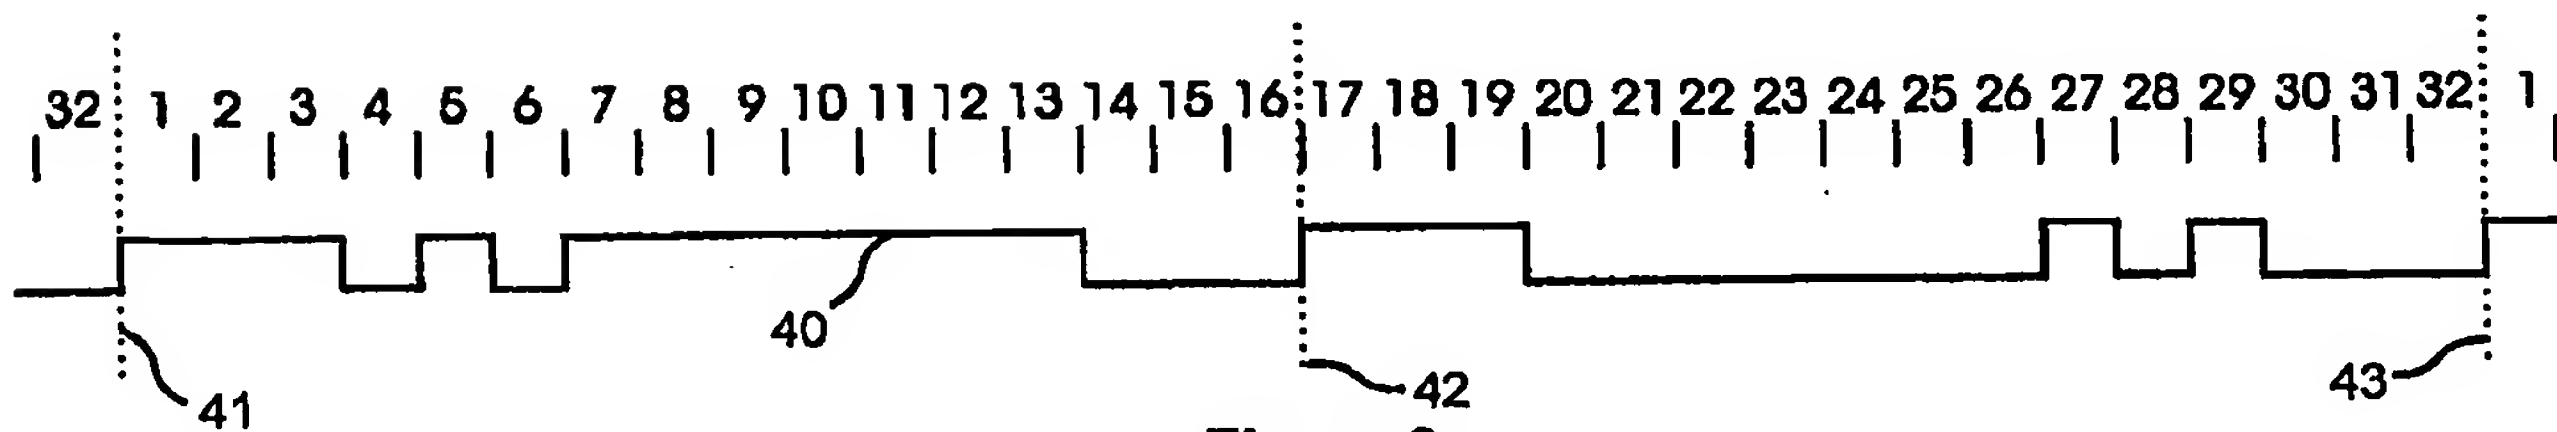


Figure 3.

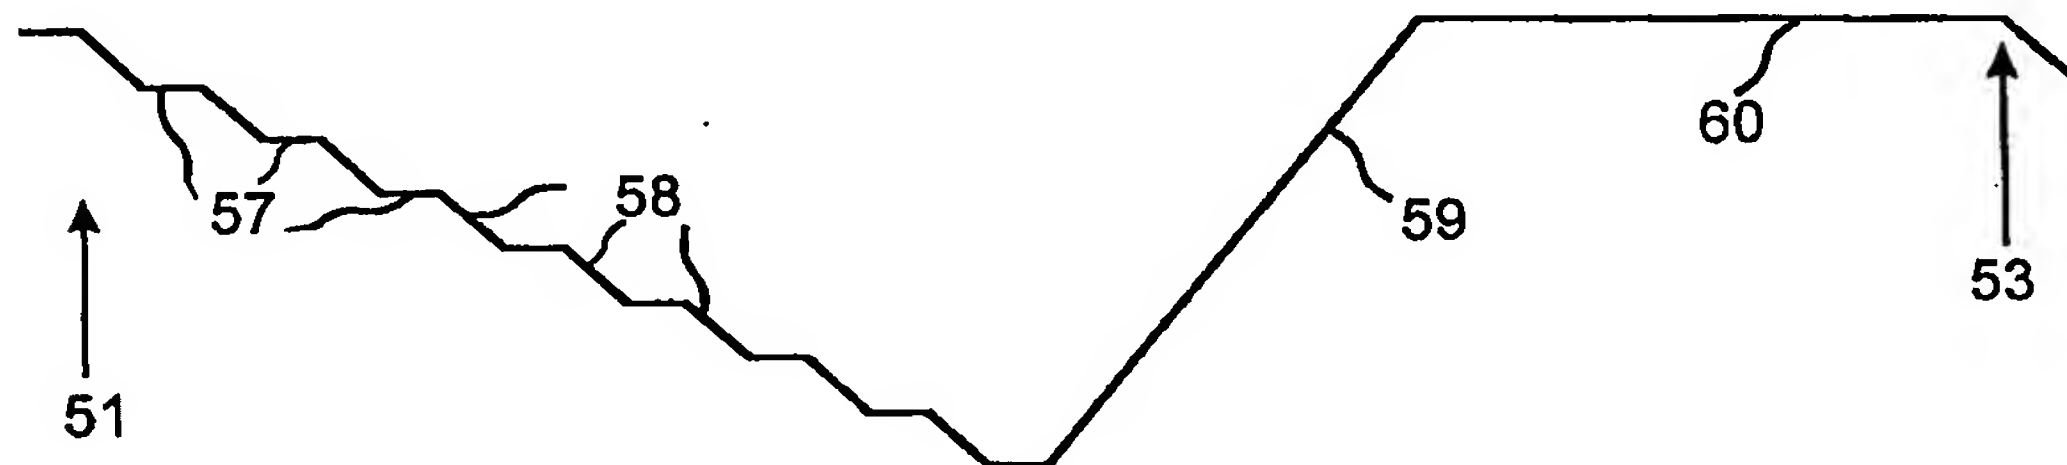
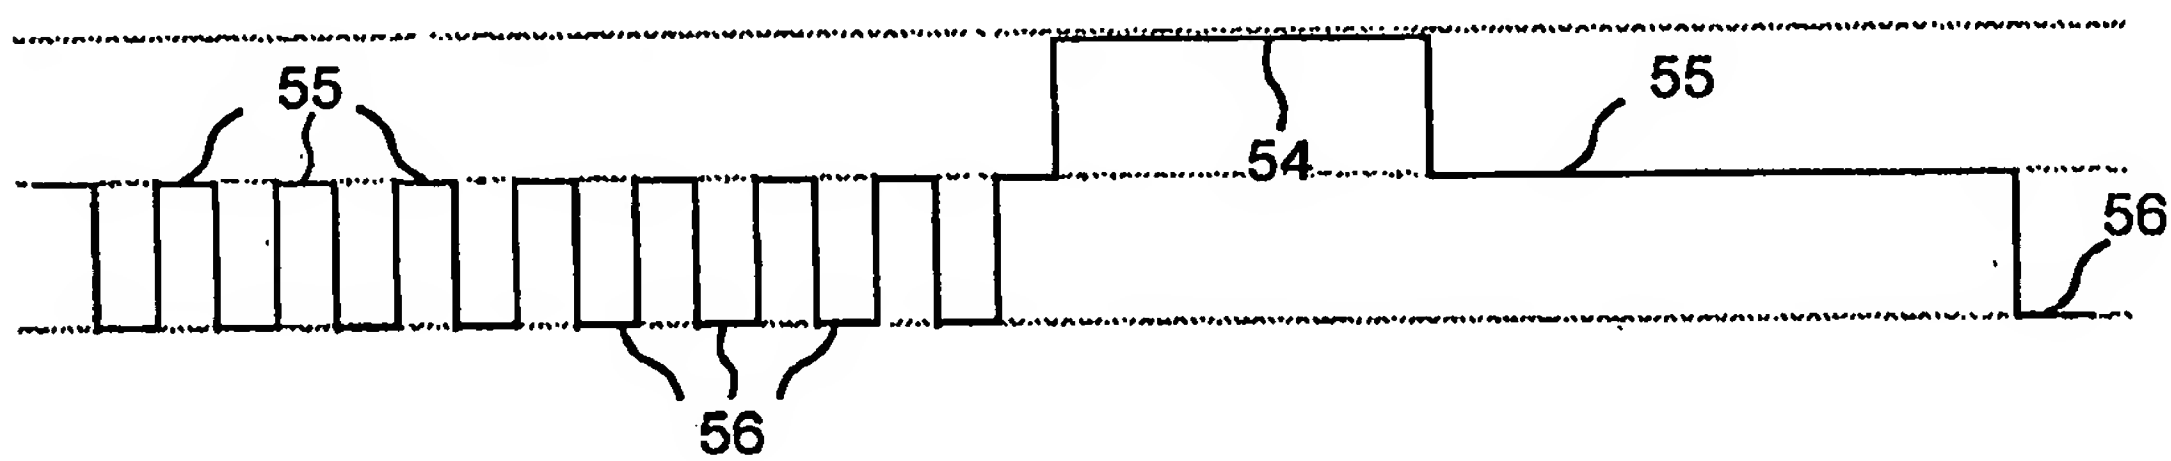


Figure 4.

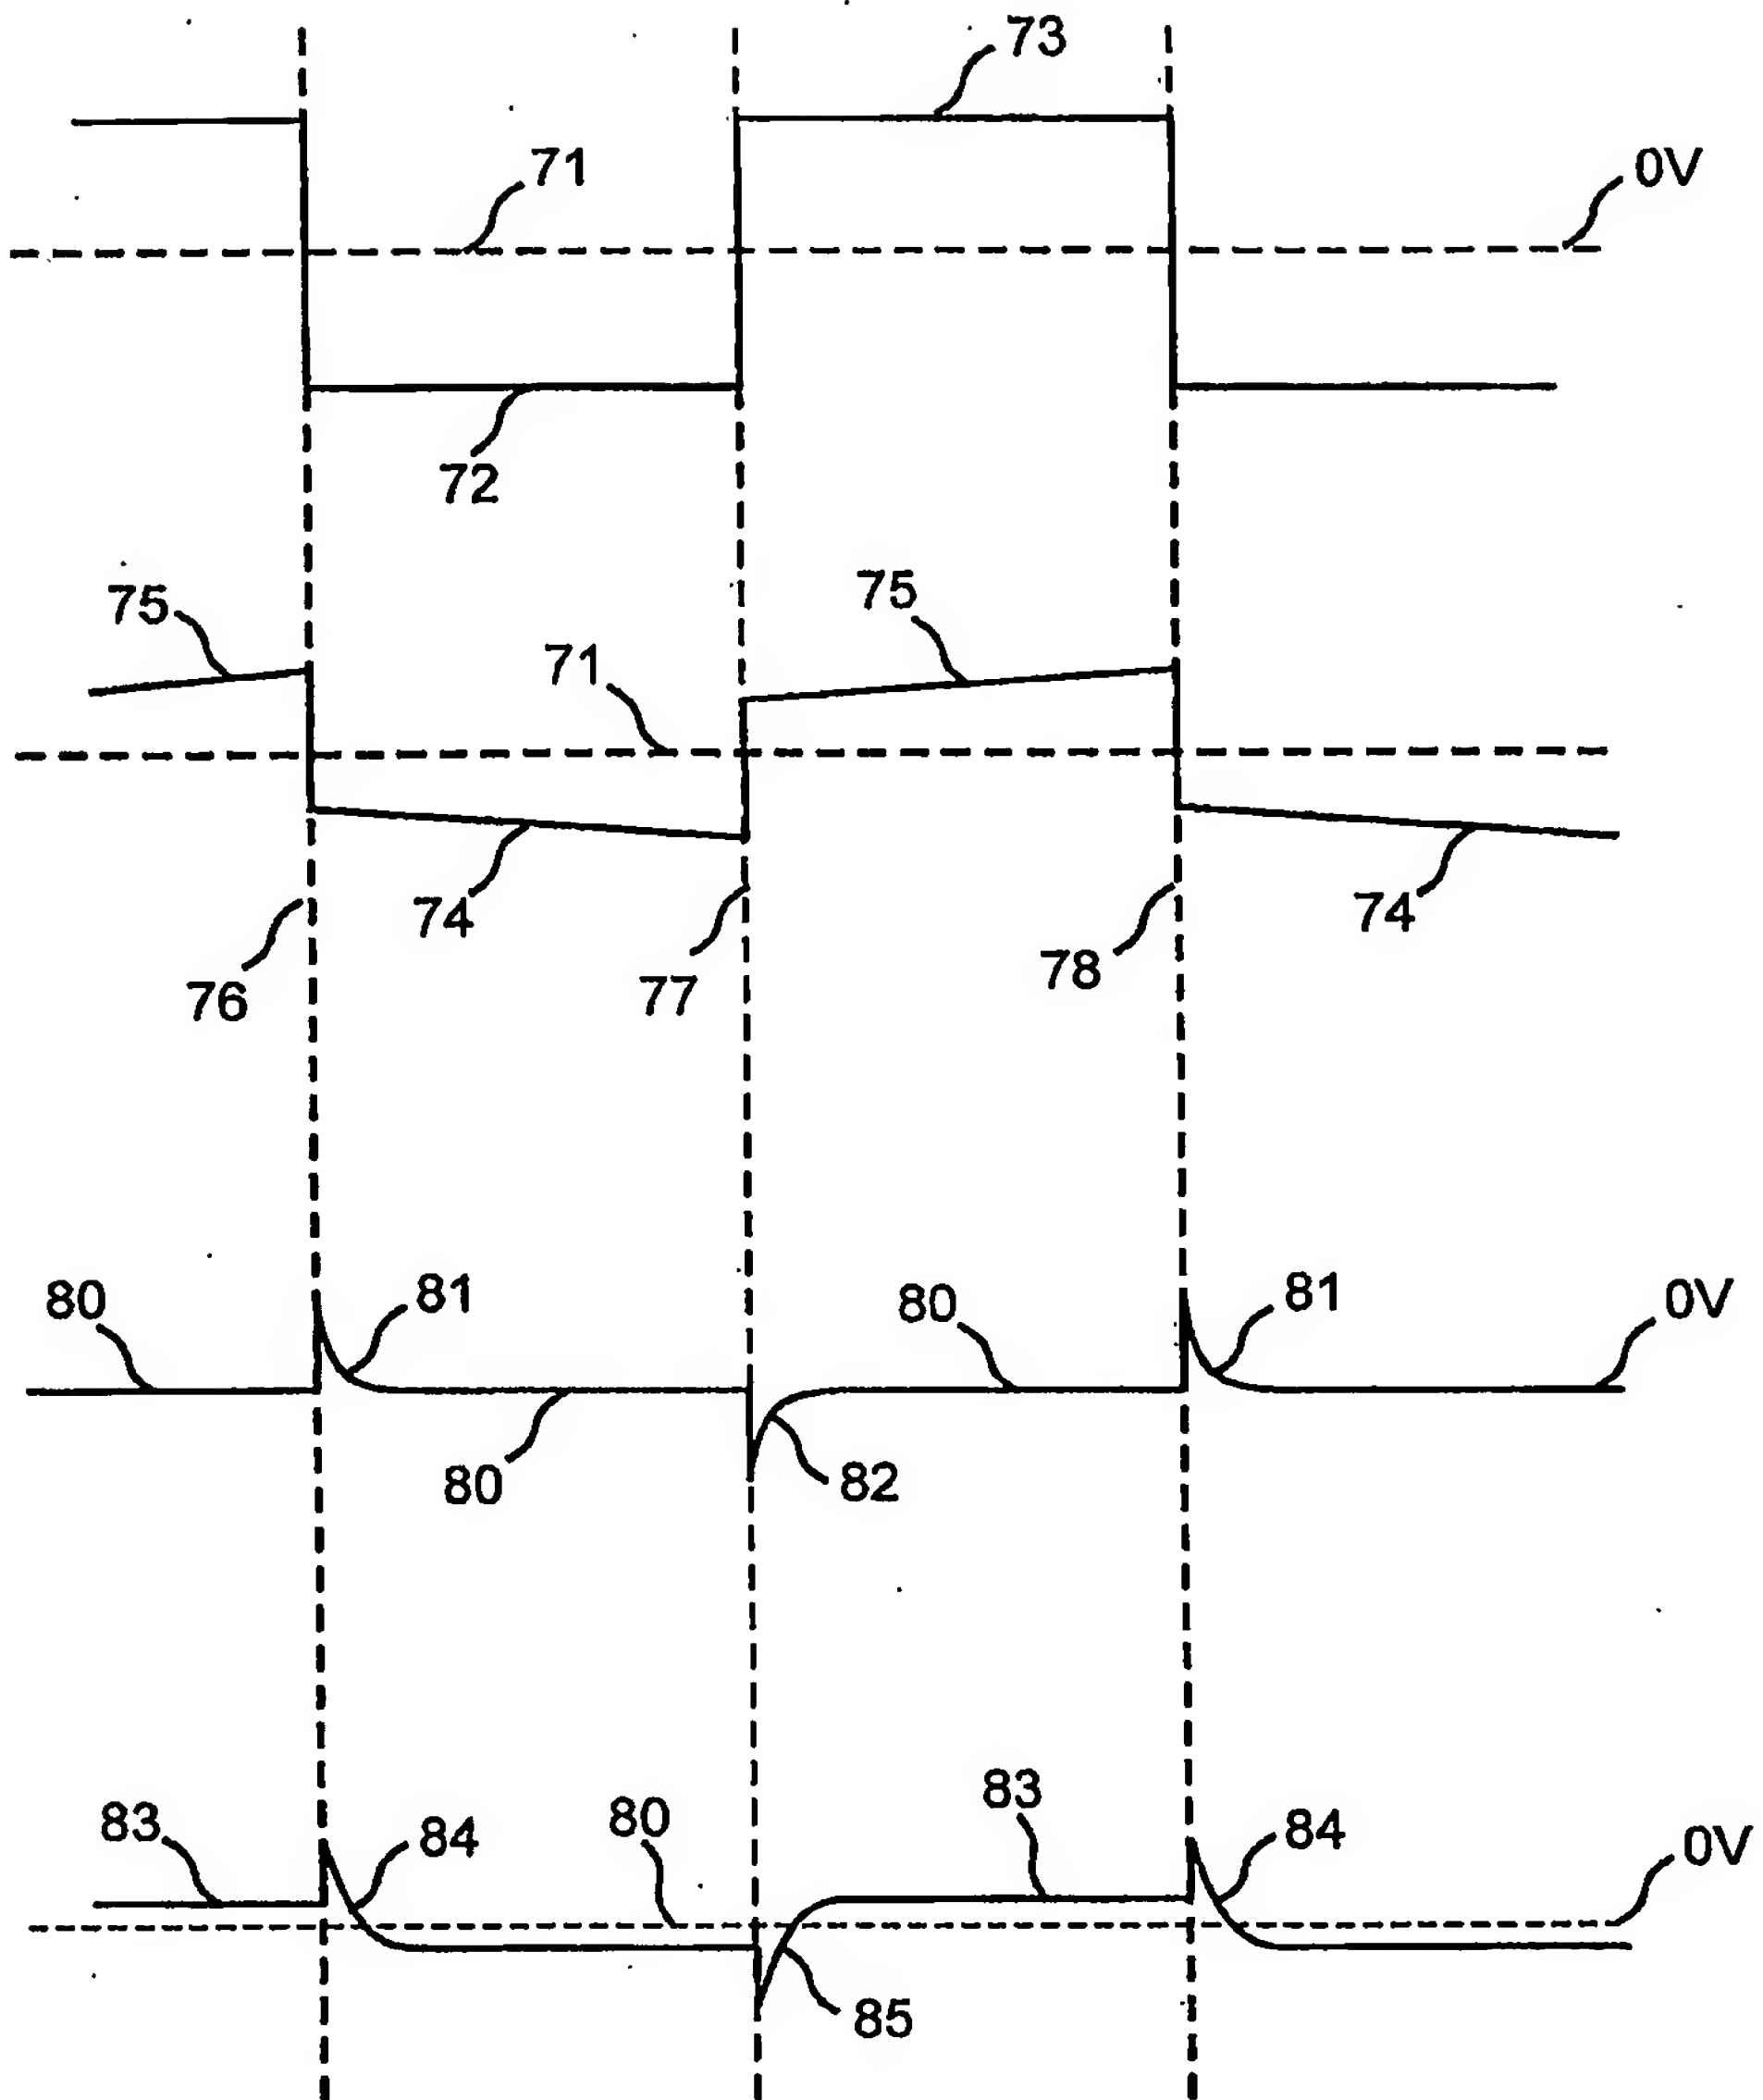


Figure 5.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU2004/001555

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl. 7: G01V 3/11

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
DWPI with keywords: metal, detect+, reactive, voltage, constant, unvary+, unchang+, ratio, quotient, frequenc+

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 537 041 A (CANDY) 16 July 1996 See Figures 2B (21), and 4B (33).	1, 9
A	US 4 942 360 A (CANDY) 17 July 1990 See claim 1.	9
A	US 4 563 644 A (LENANDER et al) 7 January 1986 See the abstract, and claim 1.	9
P, A	US 2004 189 302 A1 (YOSHIDA) 30 September 2004 See the abstract, and claim 1.	9



Further documents are listed in the continuation of Box C



See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
12 January 2005

Date of mailing of the international search report
17 JAN 2005

Name and mailing address of the ISA/AU
AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
E-mail address: pct@ipaaustralia.gov.au
Facsimile No. (02) 6285 3929

Authorised officer
ROSS BURDON
Telephone No : (02) 6283 2605

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU2004/001555

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
US	4 942 360	AU	78912/87	ZA	8706706
US	5 537 041	AU	52364/90		
US	2004/0189302	DE	1020040138	JP	2004283435
US	4 563 644	CA	1224257	SE	8202094
				EP	0091034
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.					
END OF ANNEX					